

# FOVNO 全电动吸盘车顶架 N-Power 说明书

## Electric Sucker Bike Rack N-Power Instructions

**FOVNO**

# Terms and Conditions

---

Please read these instructions carefully before using this product. The instructions contain important information which will help you get the best out of the product and ensure safe and proper installation, use and maintenance.

- Do not squeeze or impact the product forcibly.
- Do not disassemble or modify this product.
- Children should be supervised to ensure that they do not use this product as a toy to avoid unnecessary accidents.
- This product needs to be used with the attached alarm, which serves as a reminder during the use of the roof rack. If, when in use, the alarm continues to sound please stop your vehicle and check our troubleshooting guide. If you are unable to solve the issue, please refrain from using the product until you have contacted customer service.
- In normal use of this product, the suction cup will slowly leak air. When the air pressure inside the leaking suction cup reaches the set minimum pressure value, the N-Power control box will pump the air automatically, and the alarm will sound. The alarm will stop after a few seconds. The time it takes the N-Power control box to create a vacuum depends on the hose length and other system settings. Normal operating time is between 2 - 15 minutes and during this time it is normal for the alarm to sound.
- It is normal for the suction cup to leak slowly during use. If the control box starts frequently within 2 minutes(while the alarm keeps buzzing), it is considered to be air leaking too fast. Frequent start of the control box will cause the internal motor to overheat and not function properly. If similar situations occur, please check whether the suction cup is damaged, whether the suction part is flat and smooth or whether the hose and quick connector are damaged immediately. If the above problems are removed, but the frequent start-up phenomenon still occurs, it could mean something is a problem with the product. Please contact customer service immediately. Some products have a particularly good sealing performance and when the adsorption surface is particularly smooth, it may cause the control box to work automatically at an interval of more than 20 minutes. If the buzzing alarm doesn't go off for a long time, please open the suction cup, in which way, you will find out if the control box is working normally. If the control box is working normally, there is no need to worry.
- Before use, please check the battery charge level in the N-Power control box and charge if needed. Do not use with a low battery.
- Before use, please check whether the roof rack control box is working normally with sufficient power. Press the main body of the roof frame on a smooth surface, turn on the power switch, and press the main body of the roof frame vertically with your hand. After all the suction cups seal to the surface, open any of the suction cups, the control box should start to work and this suction cup should re-adsorb the surface immediately, this is what we consider normal operation (Meanwhile, connect to the power of the alarm. The alarm should start to buzz with the control box starts to work, and stop when the suction cup adsorbed completely).
- Before use, make sure that the filter sponge at the suction port on the bottom of the suction cup is in good condition. The filter sponge has a great protective effect on the adsorption of the suction cup. It prevents dust or other items from entering the suction pipe and guarantees the airtightness of the air valve in the suction cup.


- Before use, please clean the roof area and the bottom surface of the suction cup to be installed with water and dry with a microfibre cloth. The suction cup can be installed after ensuring that the area is free of dust and water.
- When using, please install the roof rack on a flat and smooth part on the roof. The surface where the suction cups are placed must not have cracks. Do not install the roof rack in places where there vinyl stickers or where there are joins between panels, glass or plastic.
- While driving, check whether the control box is working normally every 4 hours using the method above, and check whether all the suction cups are functioning.
- When using this product, please pay attention to the following items: the highway speed should not exceed 120km/h, and the ordinary road should not exceed the speed limit sign. Be aware of road conditions and drive slowly on uneven or bumpy conditions.
- There is a lithium battery in the control box of this product. The temperature will affect its efficiency. It is recommended to use in an environment at a temperature between -20°C and +40°C.
- During use, if the control box cannot work normally due to force majeure, please do not panic. Each suction cup of this product is equipped with an air check valve. Even if the control box is not working normally, the suction cup can still be firmly adsorbed for at least 1 hour. Please get off the car in a safe place to check and troubleshoot the problem. If the control box still does not work normally, please stop using it immediately and contact our company's customer service for repair as soon as possible.
- When the roof rack is not in use, please plug the air pipe quick interface on the control box and the main suction cup with a rubber plug to prevent foreign objects from entering and affecting the normal operation of the roof rack..

# Introduction

---

Learn about your new Fovno Bike rack

FOVNO Electric Sucker Bike Rack N-Power

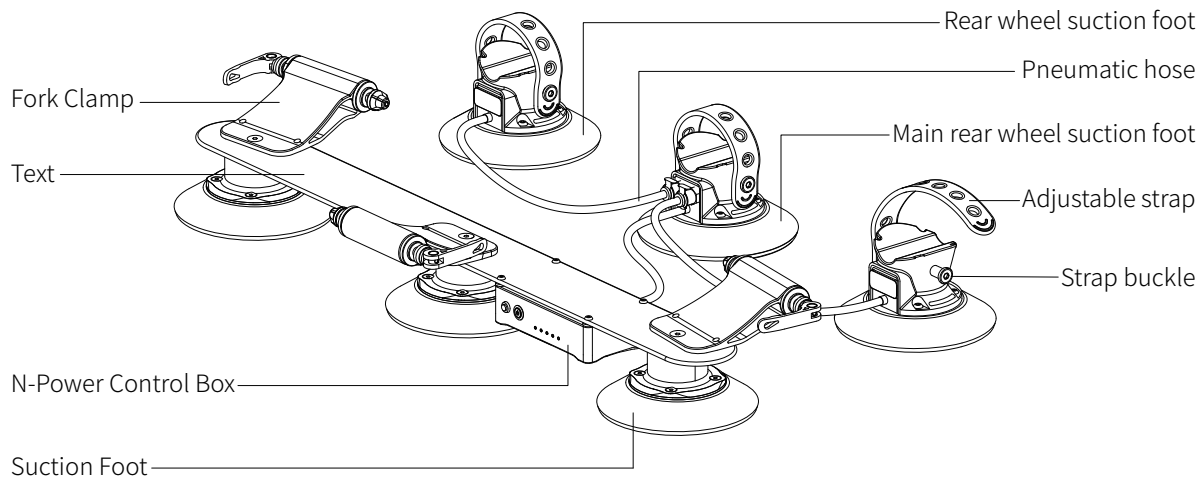




# Introduction



## Alarm System Instructions

- a. Your bike rack is fitted with a safety alarm which will alert you if the back loses its connection with the vehicle. The alarm will sound if a suction foot leaks. In the even of this happening the N-Power system will automatically attempt to create a vacuum seal using the built in pump.
- b. The alarm module is fitted with a standard USB which can be connected to your vehicle either via the vehicles own USB, a USB adaptor or USB port on a sound system. The alarm will connect to the N-Powerbox wirelessly and will alert you in the even of a pressure error. Double sided toe on the underside of the alarm can be used to hold it in place.
- C. PLEASE NOTE: If you are using more than one Fovno bike rack system on your vehicle the alarm system may not operate correctly due to a shared signal. While the alarm may not operate the N-Power box will still function as normal.

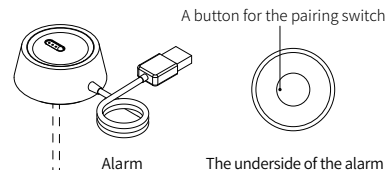

## N-Power control box functions

- Charging: Charging the N-Power box is easy and thanks to the USB C connector you can charge from a phone charger, power band or a USB charger. Simply remove the waterproof / dust cover and charge with the included USB C wire.
- The N-Power control box features USB lights that tell you the level of charge in the battery. An orange light indicates the system needs charging, blue means full and a red light indicate the system is being charged. To check the battery level press the button on the N-Power control box.

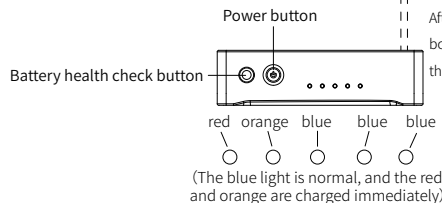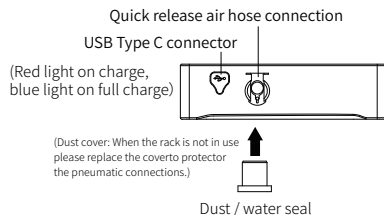


### Pairing method of alarm and control box

1. Clear data: There is a small hole on the back of the alarm that is a button for the pairing switch. After the alarm is connected to the power supply, press the switch button in the small hole for about 10 seconds. When the indicator light of the alarm is off, it means that the original data is cleared.
2. Use the same method to press the switch button in the small hole of the alarm for about 3-5 seconds. After the alarm indicator lights up, start the control box, and then stop pressing the pairing switch. At this time, the alarm buzzes to complete the pairing.


## N-Power Control Box

# Introduction


## Installation of your Fovno rack

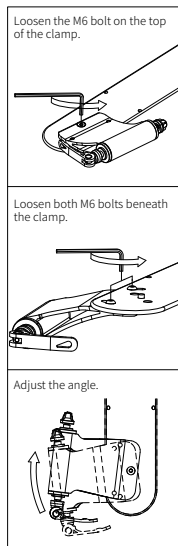


The system allows for the angle of the fork clamp to be adjusted, The system is suitable for all lengths of handlebar, Please prevent handlebars for making contact when in use, Test fit the system before tightening bolts to ensure the set-up is accurate, Ensure all bolts are fully tightened and secure before use.

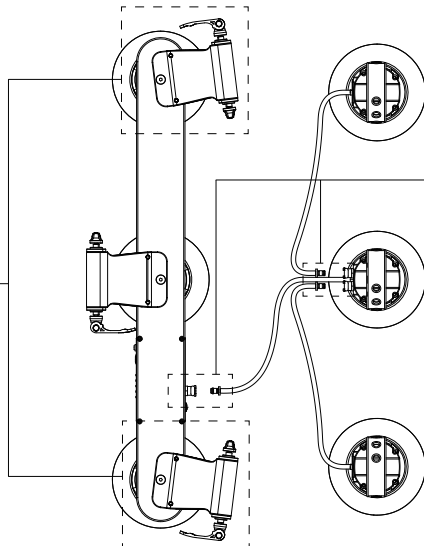


### Hose Connection



### Hose Disconnection


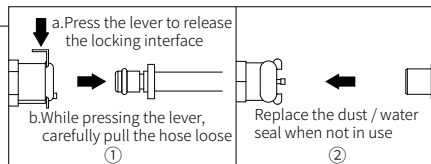




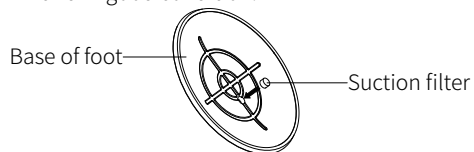







**Warning:** Ensure the suction foot filter is clean and in good condition.



# Introduction

## What's in the box






| Name                                    | Main rack frame   | Rear main suction foot   | Secondary rear suction foot  | Accessories   | Spares  |
|---|---|--|--|---|---|
| FOVNO Electric Sucker Bike Rack N-Power |  |  ×1 |  ×2 |  3 x wheel straps<br> 3 x crank straps<br> 1 x alarm<br> 1 x microfibres cleaning cloth<br> 1 x USB Type C cable<br> 1 x Allen key |  4 x dust / water seal<br> 4 x seals<br> 4 suction cup filters |

## Specification


|  |   |                                 |           |
|--|---|---------------------------------|-----------|
| Model Number   | ES-03B3                                   | Battery capacity                | 3400mAh   |
| Size   | 805×112mm                                 | Input                           | DC5V      |
| System weight  | 4.3kg                                     | Power                           | 13W       |
| Carry capacity   | 3 vehicles<br>(maximum mass 20kg/vehicle) | Maximum negative pressure       | -65KP     |
| IP Rating  | IP65                                      | Wireless transmission frequency | 433.92MHZ |
| Our products have acquired the CE-RED,FCC-RED,ROHS,UKCA,UN38.3,MSDS,EN62133 Certification. |   |                                 |           |

# Introduction

The Fovno bike rack comes fitted adaptors to suite quick release type hubs, but the system includes additional adaptors for other fork and axle standardsr (to be purchased separately).

| Alternative axle adaptors |   |   |   |  |   |
|---------------------------|---|---|---|--|---|
| Size                      | 9*100mm   | 12*100mm  | 15*100mm  | 15*110mm   | 20*110mm  |
| Model                     |  |  |  |  |  |

How to change axle adaptors

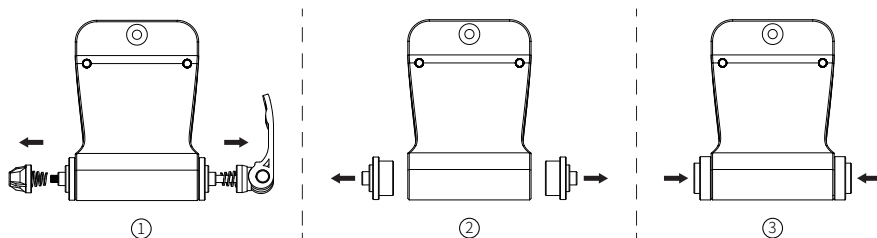

# Instructions



---

1. Connect the alarm to a suitable USB power supply (vehicle USB, powerbank etc). If working normally a red LED light will be shown.
2. Place the bike rack on your vehicle in the desired location. Turn on the N-Power control box. At this time the alarm should ring and the automatic vacuum pump should be operating. Press the rack down on the surface of your vehicle while the pump runs. The system will create a vacuum to fasten the rack in place and will automatically stop once the pressure is correct. With the pressure correct and the rack firmly in position the alarm will automatically shut off.
3. With the front portion of the rack installed you can now fit your bike. Remove the front wheel of your bike and carefully lift it into position. Use the appropriate axle adaptors to clamp your fork in place. Warning! Please ensure all bolts are fully tightened to prevent accident, damage and unwanted vibration.
4. With your bike in place you will now be able to choose the perfect location for the rear suction foot and wheel locator. Press the suction foot in place by hand then connect the pneumatic air hose to the N-Power control box. The alarm will once again sound, but will stop once the correct pressure is achieved. If you plan to carry additional bikes, follow this stem again but connect additional hoses to the main suction foot.
5. With the rear suction foot in place sit the rear wheel into position and use the buckle to secure in place.
6. We recommend that you use a strap to keep your crank arm in place while driving. This will prevent the crank moving and causing damage in transit.
7. Once your bike/s are in position give the entire system a final check. Ensure that all suction cups are secure and that there are no leaks, Also ensure that the fork axle is secure, the bike isn't moving. Also strap your wheels and crank to prevent movement.
8. To remove the rack first remove your bike. Switch the N-Power control box off then lift the edges of the suction foot to break the air seal to your vehicle. The rack will then easily lift away from your vehicle.
9. When not in use store the rack in a clean box and ensure that the suction cups are not damaged or deformed.

## Installation



Correct



Wrong



# Trouble Shooting

---

| Problem  | Possible Issue                           | Solution                                      |
|--|--|---|
| Alarm isn't functioning                          | Check the USB connection.                | Please check USB connection and power source. |
|  | Alarm is damaged.                        | Contact customer service.                     |
| Control box isn't functioning                    | Low power in battery.                    | Fully charge and retry.                       |
|  | Battery is damaged.                      | Contact customer service.                     |
| Control box lights not functioning when charging | Loose connectoin.                        | Check wires are connected properly.           |
|  | System is in sleep mode.                 | Use as normal.                                |
|  | Not the above and still not working.     | Contact customer service.                     |
| Suction cups not functioning                     | Damaged suction cups.                    | Contact customer service.                     |
|  | Poor seal due to uneven/cracked surface. | Move system.                                  |
|  | Lost fliter.                             | Replace filter.                               |
|  | Damage to hose.                          | Replace Hose.                                 |

# Warranty

---

The after sales service of this Fovno Electric Sucker Bike Rack N-Power controller is strictly based on the be “Consumer Rights Protection of the People's Republic of China” and “The Product Low of the People's Republic of China” .

## Warranty Period

- 1、If the product fails to perform within 7 days of purchase, it should be tested by the manufacturers after sales service centre to determine if there is a fault.
- 2、Within 8-15 days from the next day after you sign for the product, if the product has performance failures listed in the "FOVNO Electric Sucker Bike Rack N-Power Product Performance Failure Table", it can be determined by the manufacturer's after-sales service centre. Enjoy free replacement or repair services.
- 3、Within 12 months from the day after you sign for the product, if the product has performance failures listed in the "FOVNO Electric Sucker Bike Rack N-Power Product Performance Failure Table", it has been tested and determined by the manufacturer's after-sales service centre, and you can enjoy it for free Maintenance service.

## Issues not covered by this warranty

- 1、Unauthorised maintenance, misuse, collision, negligence, liquid ingress, accident, altercation, incorrect use of this product and its accessories, remove or altering labels or anti-counterfeiting marks.
- 2、The validity period of the warranty has expired.
- 3、Damage caused by force majeure.
- 4、Issues not met in the performance failures listing.
- 5、Human error.

## List of product performance failures

| Name                                    | Performance failure  |
|---|--|
| FOVNO Electric Sucker Bike Rack N-Power | <ol style="list-style-type: none"><li>1、Control box not functioning.</li><li>2、Control box is not charging.</li><li>3、Alarm is not functioning.</li><li>4、Suction cups are not creating a vacuum with no visible damage.</li></ol> |

# Maintenance

---

The pneumatic air hoses and interlocking interfaces should be coated with a silicone based oil to ensure sealing performance. If a suitable lubricant cannot be found, an edible oil can be used as a substitute.

When the roof rack is not in use please disconnect pneumatic air hoses and replace the dust / water seals to prevent dirt or debris from entering the system.

After use please ensure the battery in the control box is fully charged and check the battery level every 3 months. Recharge when necessary.

## warranty card

|                        |  |
|------------------------|--|
| User name              |  |
| Address                |  |
| Telephone number       |  |
| Product name and model |  |
| Purchase date          |  |

## Maintenance record

| Number | Date | Issues and service | Service Center | Service engineer |
|--------|------|--------------------|----------------|------------------|
| 1      |      |                    |                |                  |
| 2      |      |                    |                |                  |
| 3      |      |                    |                |                  |



搜索  
Search

Fovno Tech

关注我们  
Follow us



Facebook



YouTube



新浪微博

微信公众号



WeChat Official Accounts



Instagram

安装教程



Installation Video

服务网址/Service Website : [www.fovno.com](http://www.fovno.com)

公 司 名 称 : 义乌市风动科技有限公司

Company name : Yi Wu Feng Dong Technique LTD

地 址 : 浙江省金华市义乌市义亭镇稠义西路168号

Adress : No.168, Chouyi West Road, Yiting Town, Yiwu City, Jinhua City, Zhejiang Province